


ROUND DEEP/SPOT LIGHT/FIXED/MICRO

Model: RR-DL3438

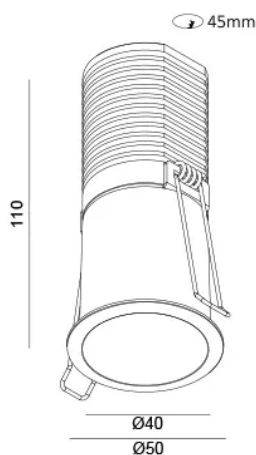

Feature:

- Deep recessed
- Compact design
- High quality PMMA lens in different beam angles

Technical data:

- Light source COB Chip, Cree or others
- LED Power (max) 9W (250mA, 36V)
- System Power (ref.) 11W (ref. only depends on the ECG)
- Lumen flux (typ.) 750lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam step 3
- Beam Angle 17D, 24D, 36D PMMA lens
- Tilttable No
- Ingress protection IP44
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White RAL9016/Black RAL9005
- Construction Aluminum, Polycarbonate
- Installation Ceiling Recessed, spring type
- Dimension 50mm(OD)x110mm(H)/Cutout 45mm
- LED Driver Remote
- Trimless verison Yes, Please check with sale in detail

Electronic control gear

NON-DIM/Dimmable

IDP MP series

Other brand is available upon request

*Use IDP multi-power LED Driver can trim down the output power according to actual application.

Light Distribution For 3000K

medium 20.8°			wide 36°		
h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	2357	ø0.37	1	2120	ø0.65
2	589.2	ø0.74	2	530.0	ø1.30
3	261.9	ø1.10	3	235.5	ø1.95
4	147.3	ø1.47	4	132.5	ø2.60
5	94.28	ø1.84	5	84.80	ø3.25

****The specification is subject to change without note.****