


## SIMPLE/SPOT LIGHT/TILTABLE

**Model: RR-DL3151**

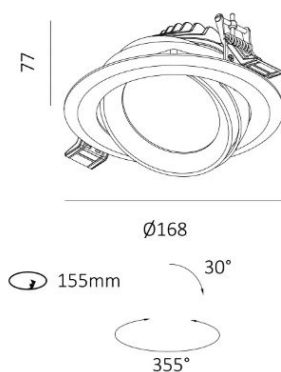

### Feature:

- LED power up to 25W.
- Tilttable
- Low UGR

### Technical data:

- Light source COB or others
- LED Power (max) 25.2W (700mA, 36V)
- System Power (ref.) 30W (ref. only depends on the ECG)
- Lumen flux (typ.) 2500lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index Ra $\geq$ 90
- MacAdam Step 3
- Beam Angle 24D, 38D Reflector
- Tilttable Yes
- Ingress protection IP54
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation Ceiling Recessed, Spring type
- Dimension 168mm(OD)x77mm(H)/Cutout 155mm
- LED Driver Remote
- Trimless version No

### Electronic control gear

NON-DIM/Dimmable **IDP** MP series

1-10V/0-10V/DALI **IDP** SC series

Other brand is available upon request

\*Use IDP multi-power LED Driver can trim down the output power according to actual application.

### LIGHT DISTRIBUTION for 3000K medium 36°

| h(m) | E(lx) | Ø(m)  |
|------|-------|-------|
| 1    | 4420  | Ø0.65 |
| 2    | 1105  | Ø1.31 |
| 3    | 491.1 | Ø1.96 |
| 4    | 276.2 | Ø2.62 |
| 5    | 176.8 | Ø3.28 |

**\*\*The specification is subject to change without note.\*\***