

SIMPLE/SPOT LIGHT/FIXED/COMMERICAL

Model: RR-DL3540-1



Feature:

- Deep recessed downlight
- Simple design with 6" and 8" trim ring.
- Screw mount with IP54 rating

Technical data:

- Light source COB or others
- LED Power (max) 18W (500mA, 36V)
- System Power (ref.) 21W (ref. only depends on the ECG)
- Lumen flux (typ.) 1700lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 15D, 24D, 36D, 60D PMMA Lens
- Tilttable No
- Ingress protection IP54
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Buffle Finishing White/Black
- Construction Aluminum
- Installation Ceiling Recessed, Screw mount
- Dimension 158mm(OD)x96mm(H)/Cutout 145mm
198mm(OD)x96mm(H)/Cutout 150-190mm
- LED Driver Remote
- Trimless version No

Electronic control gear

NON-DIM/Dimmable

IDP MP series

1-10V/0-10V/DALI

IDP SC series

Other brand is available upon request


*Use IDP multi-power LED Driver can trim down the output power according to actual application.

LIGHT DISTRIBUTION for 3000K

wide 57°

h(m)	E(lx)	Ø(m)
1	2090	Ø1.08
2	522.5	Ø2.17
3	232.2	Ø3.27
4	130.6	Ø4.36
5	83.60	Ø5.45

****The specification is subject to change without note.****

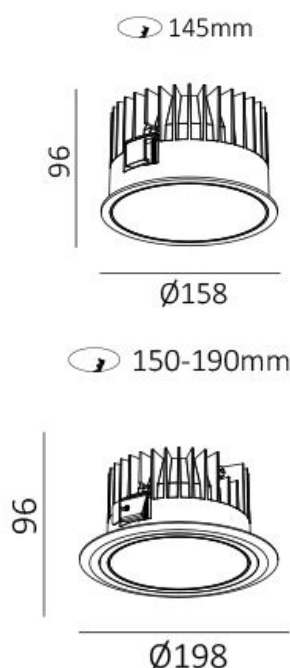

150-190mm

