

SIMPLE/SPOT LIGHT/TILTABLE/COMMERICAL

Model: RR-DL3380



Feature:

- Front Removable
- Compact design with 18W LED Power
- Tiltable

Technical data:

- Light source COB or others
- LED Power (max) 18W (500mA, 36V)
- System Power (ref.) 21W (ref. only depends on the ECG)
- Lumen flux (typ.) 1450lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index Ra \geq 90
- MacAdam Step 3
- Beam Angle 17D, 24D, 36D Reflector
- Tiltable Yes
- Ingress protection IP54
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation Ceiling Recessed, Spring type
- Dimension 95mm(OD)x86mm(H)/Cutout 85mm
- LED Driver Remote
- Trimless version No

Electronic control gear


NON-DIM/Dimmable

IDP MP series

1-10V/0-10V/DALI

IDP SC series

Other brand is available upon request

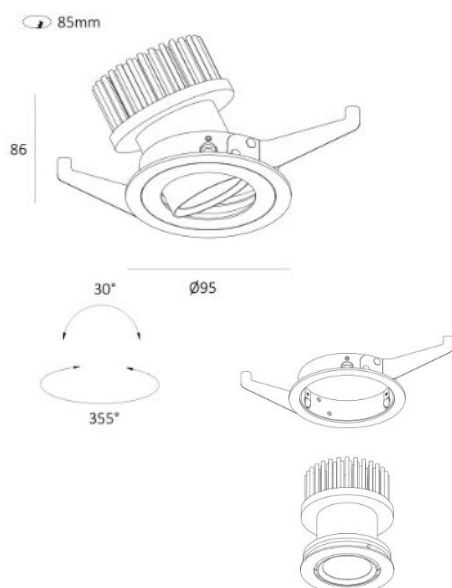

LIGHT DISTRIBUTION for 2700K
wide 24.1°

h(m)	E(lx)	Ø(m)
1	7369	Ø0.43
2	1842	Ø0.85
3	818.8	Ø1.27
4	460.6	Ø1.70
5	294.8	Ø2.12

****Accessory (optional): Honeycomb, Diffuser****

****The specification is subject to change without note.****