

SPOT/CYLINDAR/SLIM/SURFACE MOUNT/TRIPLE HEADS

Model: SU-SD3153



Feature:


- Triple heads surface mount cyclinder spot light
- 355 degree rotate and 90 degree tilt
- Interchangeable baffle

Technical data:

- Light source COB or others
- LED Power (max) 7.2W x 3 (200mA, 36V)
- System Power (ref.) 9W x 3 (ref. only depends on the ECG)
- Lumen flux (typ.) 650lm x 3
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index Ra \geq 90
- MacAdam Step 3
- Beam Angle 20D, 40D, 60D Reflector
- Tilttable Yes
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Baffle Finishing White/Black/silver grey/sand brass
- Construction Aluminum
- Installation Surface mount
- Dimension Refer to drawing
- LED Driver Build in
- Trimless verison No

Electronic control gear

Build in LED driver

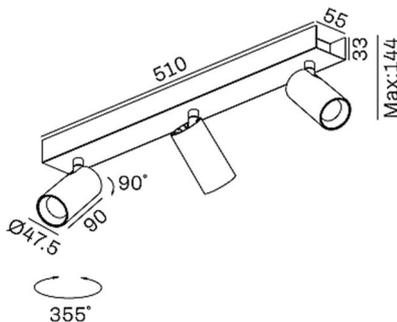

Light Distribution For 2700K
wide 36°

h(m)	E(lx)	ø(m)
1	1932	ø0.64
2	482.9	ø1.28
3	214.6	ø1.92
4	120.7	ø2.57
5	77.27	ø3.21

****The specification is subject to change without note.****