

SPOT/CYLINDAR/CUP/SURFACE MOUNT

Model: SU-SD3079



Feature:

- Surface mount CUP Shape spot light
- 355 degree rotate and 40 degree tilt
- Interchangeable baffle

Technical data:


- Light source COB or others
- LED Power (max) 7.2W (200mA, 36V)
- System Power (ref.) 9W (ref. only depends on the ECG)
- Lumen flux (typ.) 500lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index Ra \geq 90
- MacAdam Step 3
- Beam Angle 36D Reflector
- Tiltable Yes
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black/Brushed Brass/Wood
- Baffle Finishing White/Black
- Construction Aluminum
- Installation Surface mount
- Dimension 60mm(OD)x107mm(H)
- LED Driver Build in
- Trimless version no

Electronic control gear

Build in on/off LED driver

Light Distribution For 2700K
wide 37.7°

h(m)	E(lx)	ø(m)
1	1212	ø0.68
2	303.0	ø1.37
3	134.7	ø2.05
4	75.76	ø2.73
5	48.49	ø3.42

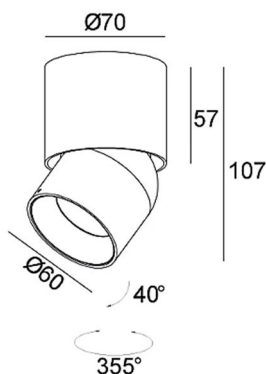

****The specification is subject to change without note.****