


## SURFACE/SPOT LIGHT/FLEXIBLE SLIM/ADJUSTABLE

**Model: SU-SD3124**

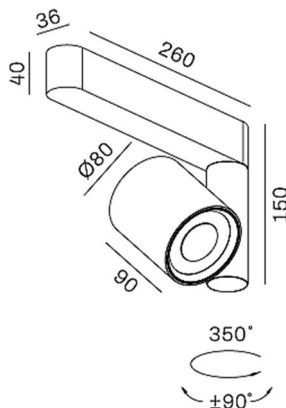

### Feature:

- Stylish surface spot
- 180 degree tilt and 355 degree rotate
- Build in LED Driver

### Technical data:

- Light source COB or others
- LED Power (max) 10.8W (300mA, 36V)
- System Power (ref.) 14W (ref. only depends on the ECG)
- Lumen flux (typ.) 1100lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index  $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 15D, 24D, 36D, 60D PMMA lens
- Tiltable Yes
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation Surface mount
- Dimension 260x36mmx150mm(H)
- LED Driver Build in
- Trimless version No

### Electronic control gear

Build in on/off LED driver  
(Dimmable LED Driver is on request)

LIGHT DISTRIBUTION for 2700K  
wide 24.1°

| h(m) | E(lx) | Ø(m)  |
|------|-------|-------|
| 1    | 7369  | Ø0.43 |
| 2    | 1842  | Ø0.85 |
| 3    | 818.8 | Ø1.27 |
| 4    | 460.6 | Ø1.70 |
| 5    | 294.8 | Ø2.12 |

**\*\*The specification is subject to change without note.\*\***