


TRACK/COMMERICAL PENDANT SPOT/ANTI-GLARE

Model: TRA-PL3030

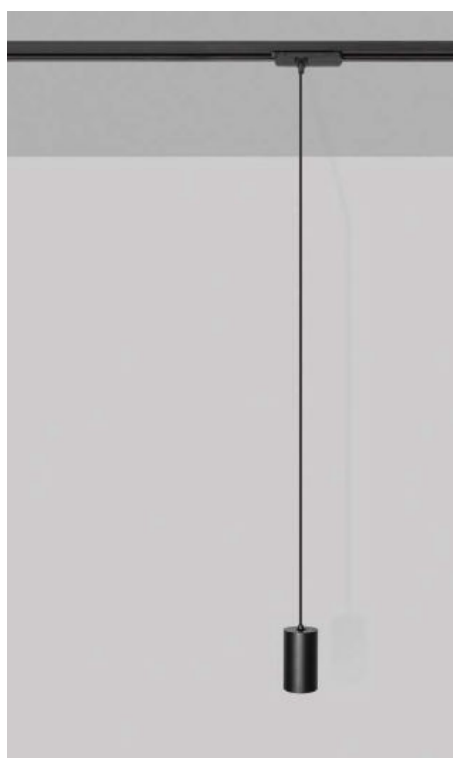

Feature:

- Pendant Spot with track mount adaptor
- Optional lamp shield
- 4ways build in track LED driver

Technical data:

- Light source COB or others
- LED Power (max) 28W (800mA, 36V)
- System Power (ref.) 34W (ref. only depends on the ECG)
- Lumen flux (typ.) 2600lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 24D, 36D, 60D Reflector
- Tilttable No
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation 4 ways Track
- Dimension Refer to drawing
- LED Driver Build in track LED driver
- Trimless version NA

Electronic control gear

Build in track On/Off LED Driver
(Dimmable LED Driver is on request)

Light Distribution For 3000K

medium 24°

h(m)	E(lx)	ø(m)
1	9251	ø0.42
2	2313	ø0.85
3	1028	ø1.27
4	578.2	ø1.70
5	370.0	ø2.12

****Accessories: Honeycomb Louvre****

****The specification is subject to change without note.****

