


TRACK/FLAT PANEL/WIDE ANGLE

Model: TRA-TR3041

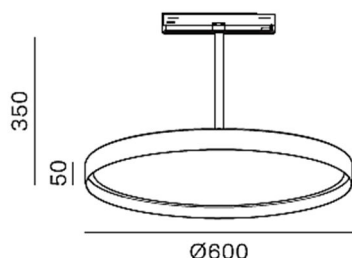

Feature:

- 600mm diameter flat panel
- 4 ways track build in track LED driver available
- WIDE angle

Technical data:

- Light source SMD2835 LED
- LED Power (max) 32.4W (900mA, 36V)
- System Power (ref.) 40W (ref. only depends on the ECG)
- Lumen flux (typ.) 1800lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle WIDE
-
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black/other color
- Construction Aluminum
- Installation Track
- Dimension 600mm(OD)x350mm(H)
- LED Driver Build in Track LED Driver
- Trimless version NA

Electronic control gear

Build in track On/Off LED Driver
(Dimmable LED Driver is on request)

Light Distribution For 3000K

wide 114,4°

h(m)	E(lx)	ø(m)
1	624.7	ø3.10
2	156.2	ø6.21
3	69.41	ø9.31
4	39.04	ø12.42
5	24.99	ø15.52

****The specification is subject to change without note.****