
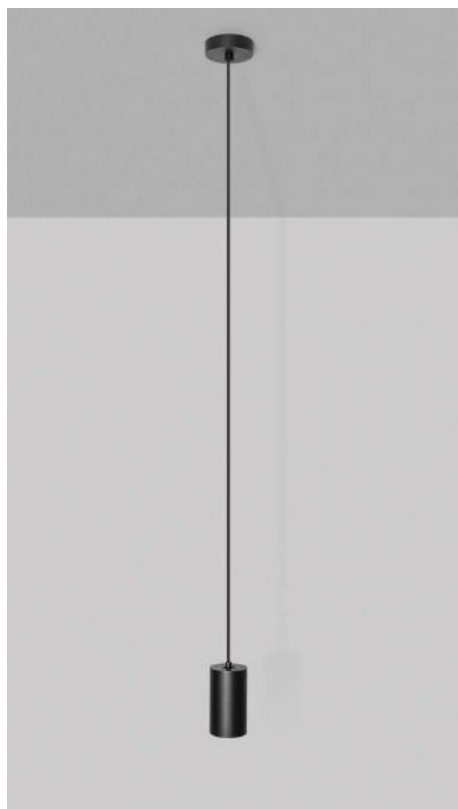


PENDANTS/SPOT SPOT/ANTI-GLARE

Model: SUP-PL3030

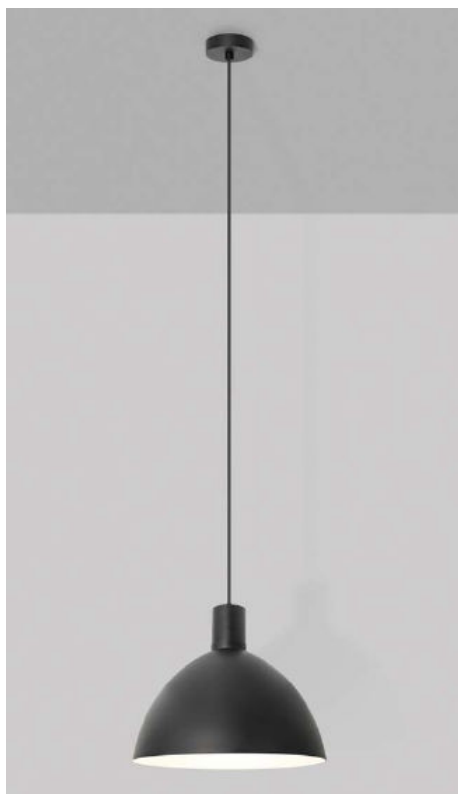

Feature:

- Pendant Spot Light with 80mm diameter tube
- Optional lamp shield
- Build in LED driver

Technical data:

- | | |
|--------------------------|---|
| ▪ Light source | COB or others |
| ▪ LED Power (max) | 28W (800mA, 36V) |
| ▪ System Power (ref.) | 34W <small>(ref. only depends on the ECG)</small> |
| ▪ Lumen flux (typ.) | 2600lm |
| ▪ Colour temperature | 2700K, 3000K, 4000K |
| ▪ Colour rendering index | Ra≥90 |
| ▪ MacAdam Step | 3 |
| ▪ Beam Angle | 24D, 36D, 60D PMMA Lens |
| ▪ Tilttable | No |
| ▪ Ingress protection | IP21 |
| ▪ Operation temperature | 0-40C |
| ▪ Protection Class | III |
| ▪ LED Life time | 50,000h L70B10 |
| ▪ Finishing | White/Black |
| ▪ Construction | Aluminum |
| ▪ Installation | Suspension |
| ▪ Dimension | 80mm(OD)x170mm(H) |
| ▪ LED Driver | Build in |
| ▪ Trimless version | NA |

Electronic control gear

Build in track On/Off LED Driver
(Dimmable LED Driver is on request)

Light Distribution For 3000K

medium 24°

h(m)	E(lx)	ø(m)
1	9251	ø0.42
2	2313	ø0.85
3	1028	ø1.27
4	578.2	ø1.70
5	370.0	ø2.12

****Accessories: Honeycomb Louvre****

****The specification is subject to change without note.****

