


PENDANTS/SLIM/ANTI-GLARE

Model: SUP-PL0028

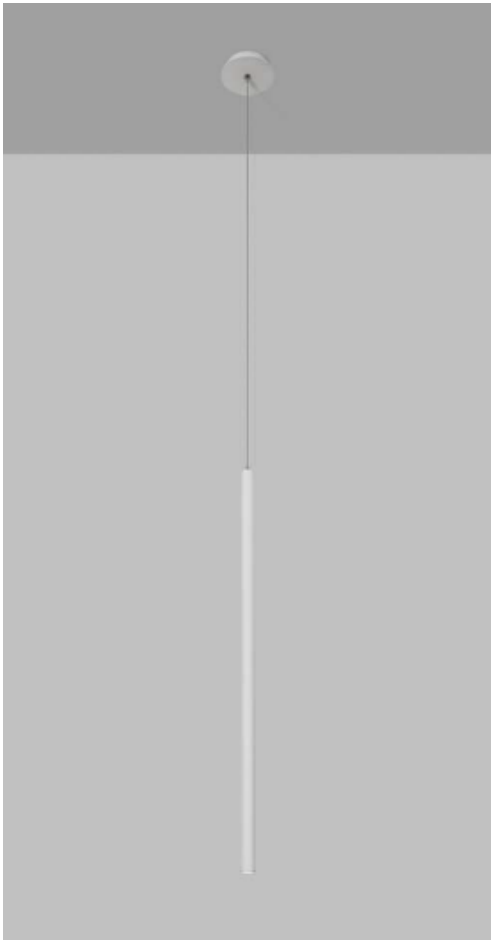

Feature:

- Pendant Slim Spot Light with 25mm diameter tube
- Slim body with steel wire
- Remote LED driver

Technical data:

- | | |
|--------------------------|-----------------------------------|
| ▪ Light source | High Power LED |
| ▪ LED Power (max) | 3.6W (100mA, 36V) |
| ▪ System Power (ref.) | 6W (ref. only depends on the ECG) |
| ▪ Lumen flux (typ.) | 300lm |
| ▪ Colour temperature | 2700K, 3000K, 4000K |
| ▪ Colour rendering index | Ra≥90 |
| ▪ MacAdam Step | 3 |
| ▪ Beam Angle | 15D, 38D PMMA Lens |
| ▪ Tilttable | No |
| ▪ Ingress protection | IP21 |
| ▪ Operation temperature | 0-40C |
| ▪ Protection Class | III |
| ▪ LED Life time | 50,000h L70B10 |
| ▪ Finishing | White/Black |
| ▪ Construction | Aluminum |
| ▪ Installation | Suspension |
| ▪ Dimension | Refer to drawing |
| ▪ LED Driver | Build in |
| ▪ Trimless version | NA |

Electronic control gear

Build in track On/Off LED Driver
(Dimmable LED Driver is on request)

****The specification is subject to change without note.****

