


PENDANTS/MICRO SLIM/ANTI-GLARE

Model: SUP-PL3059

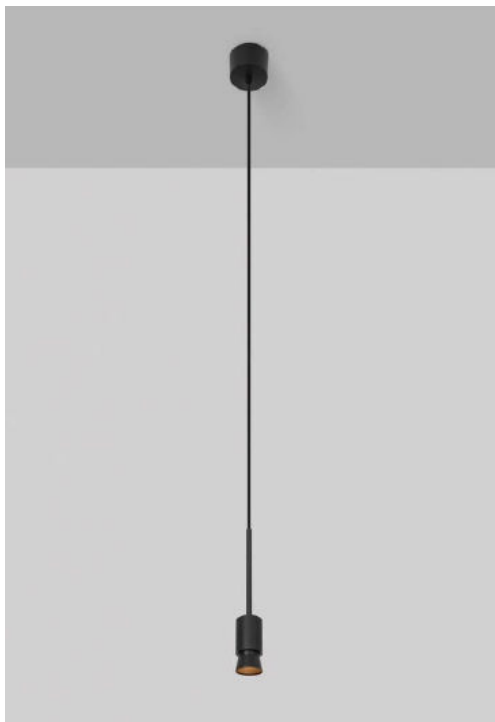

Feature:

- Micro Slim Spot Light with 50mm diameter tube
- Unique outlook design with low glare
- Remote LED driver

Technical data:

- Light source High Power LED
- LED Power (max) 6.3W (350mA, 18V)
- System Power (ref.) 9W (ref. only depends on the ECG)
- Lumen flux (typ.) 450lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 24D, 38D PMMA Lens
- Tiltable No
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation Suspension
- Dimension Refer to drawing
- LED Driver Build in
- Trimless version NA

Electronic control gear

Build in track On/Off LED Driver
(Dimmable LED Driver is on request)

Light Distribution For 2700K
wide 38°

h(m)	E(lx)	Ø(m)
1	1052	Ø0.68
2	262.9	Ø1.37
3	116.9	Ø2.05
4	65.74	Ø2.74
5	42.07	Ø3.43

****The specification is subject to change without note.****