





STEP LIGHT/INTERCHANGEABLE BEZELS

Model: EX-WL3109

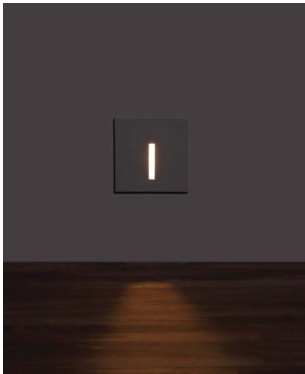



⌀ Cutout: 65mm
± 5-25mm

Option A: Square slide

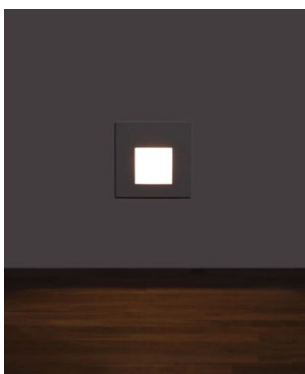



⌀ Cutout: 65mm
± 5-25mm

Option B: Square Flush

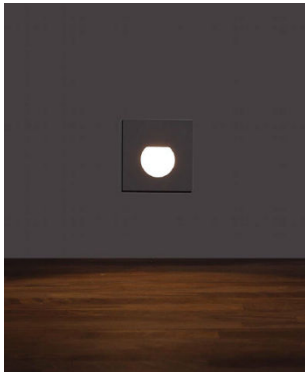


⌀ Cutout: 65mm
± 5-25mm

Option C: Square Curve



⌀ Cutout: 65mm
± 5-25mm

Option D: Round Slide



⌀ Cutout: 47mm
± 5-25mm

Option E: Round Curve

Feature:

- STEP Light
- Interchangeable bezels
- IP65

Technical data:

- Light source: High Power LED
- LED Power (max): 1.5W (500mA, 3V)
- System Power (ref.): NA (ref. only depends on the ECG)
- Lumen flux (typ.): NA
- Colour temperature: 2700K, 3000K, 4000K
- Colour rendering index: Ra \geq 90
- MacAdam Step: 3
- Beam Angle: NA
- Tilttable: No
- Ingress protection: IP65
- Operation temperature: 0-40C
- Protection Class: III
- LED Life time: 50,000h L70B10
- Finishing: White/Black
- Construction: Aluminum
- Installation: Wall mount
- Dimension: Refer to drawing
- LED Driver: Build in
- Trimless version: NA

Electronic control gear

Build in LED driver.

****The specification is subject to change without note.****