


## FLEXIBLE MINI WALL WASHER

### HIGHLIGHT FEATURE:

- Wash wall height up to 2-3 meter with uniform distribution.
- Optical lens design
- Bendable at vertical direction.
- IP67 Protection
- Robust housing with high quality silicon, UV proof and salt/alkali resistance for true outdoor application
- Easy installation with clips and bendable track
- Cut-able for flexible application
- Low voltage drive at 24V constant voltage
- 2 years Warranty

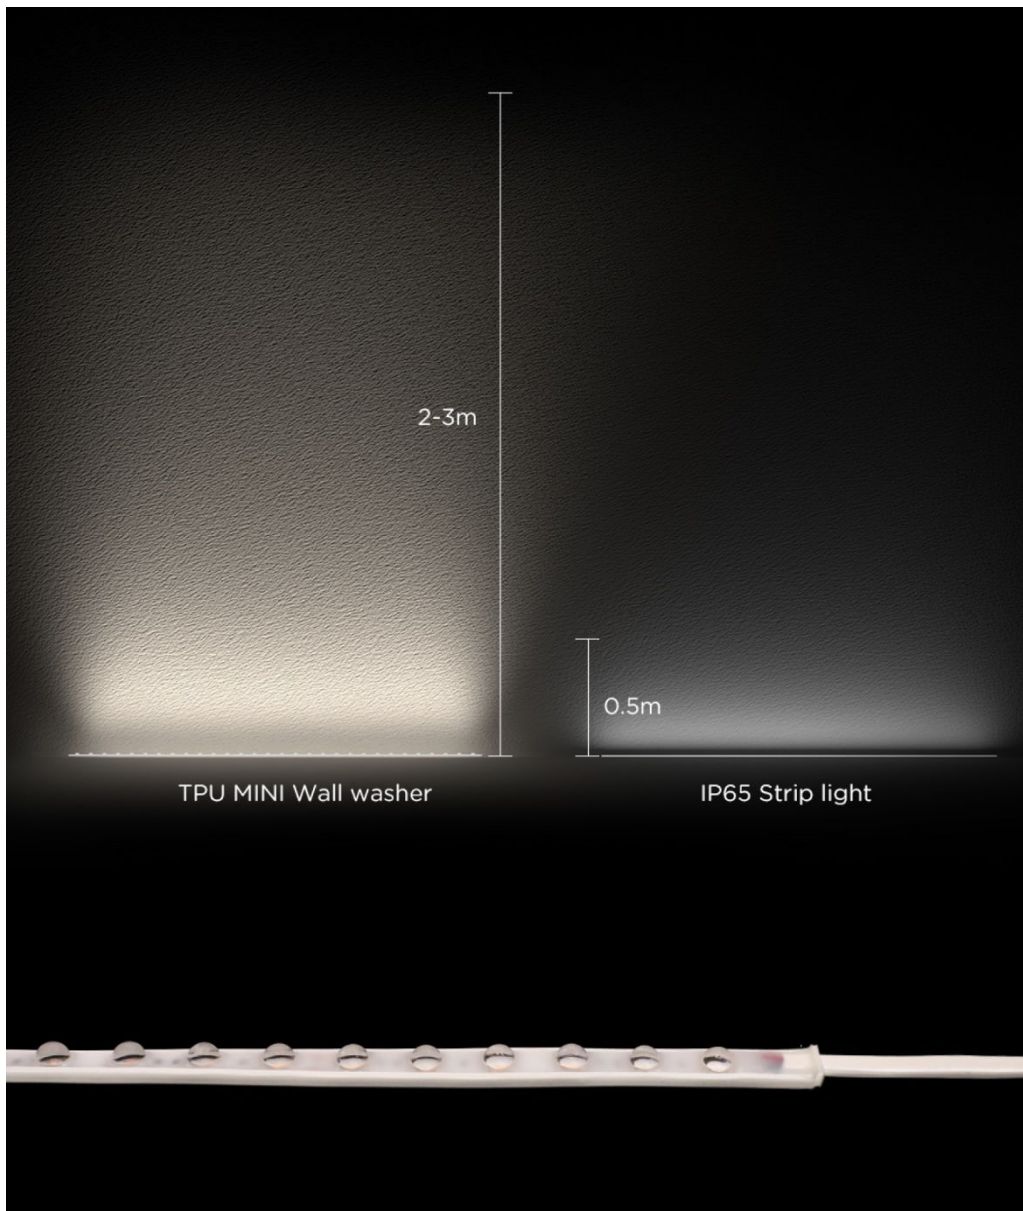

### APPLICATION


- High light the wall feature
- Architectural lights for canopy, corridor, window, archway.
- Path and contour marking
- Decorative lights for holiday, event, show and exhibition

## FLEXIBLE MINI WALL WASHER (VERTICAL BEND)



<b>Model:</b>	TPUWW-14.4W-60-XX-XXXX
<b>Input:</b>	24VDC
<b>Power:</b>	14.4W/meter
<b>LED Qty</b>	60 pcs/meter
<b>CRI</b>	>90
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>Lumen per meter</b>	840-930 lm/m (depends on CCT)
<b>Len angle</b>	30° / 60°
<b>Unit cutting length</b>	100mm
<b>Waterproof grade</b>	IP67
<b>Bending</b>	Vertical bend
<b>Operation temperature</b>	-25-60°C
<b>Max. bending</b>	Radius 50mm
<b>Roll:</b>	5 meter

### DIMENSION

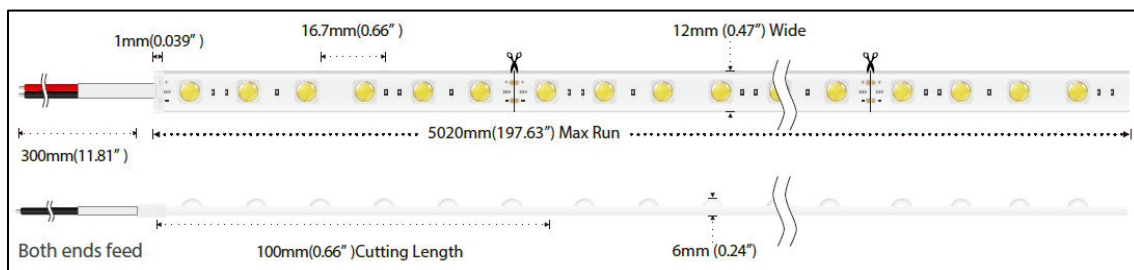


**\*\*RGB and single color version are available\*\***  
**\*\*The specification is subject to change without note.\*\***

## FLEXIBLE MINI WALL WASHER (VERTICAL BEND)




<b>Model:</b>	TPUWW-18W-24-XX-XXXX
<b>Input:</b>	24VDC
<b>Power:</b>	18W/meter
<b>LED Qty</b>	24 pcs/meter
<b>CRI</b>	>80
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>Lumen per meter</b>	1600- 1850 lm/m (depends on CCT)
<b>Len angle</b>	15°/25°/45°/60°/20x45°
<b>Unit cutting length</b>	125mm
<b>Waterproof grade</b>	IP67
<b>Bending</b>	Vertical bend
<b>Operation temperature</b>	-25-60°C
<b>Max. bending</b>	Radius 50mm
<b>Roll:</b>	5 meter

### DIMENSION

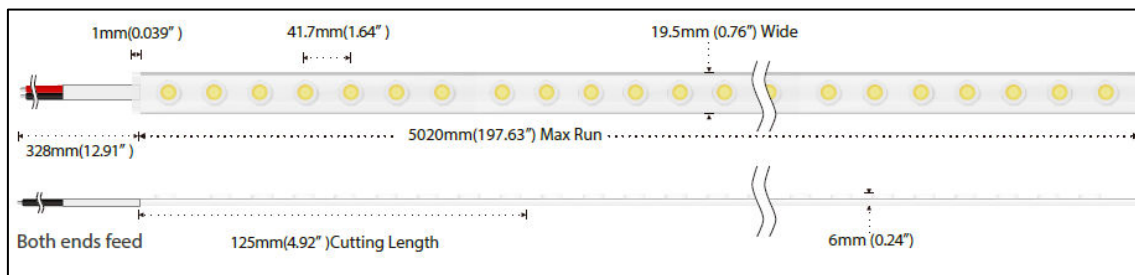


**\*\*RGB and single color version are available\*\***  
**\*\*The specification is subject to change without note.\*\***

## ***FLEXIBLE MINI WALL WASHER ACCESSORIES***



Clip



Profile

***REMARK:***