


TRIMLESS/SPOT LIGHT/FIXED/ANTI-GLARE/30mm

Model: RR-DL3559

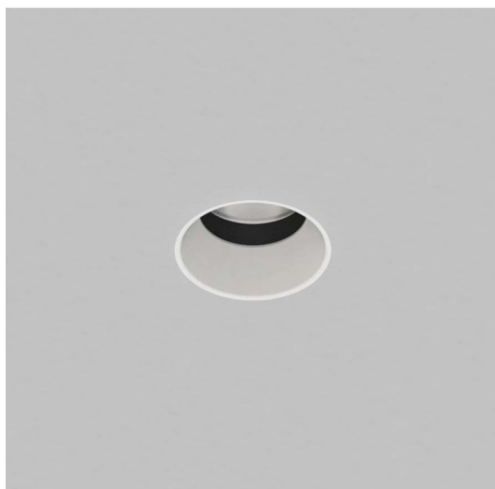

Feature:

- Ceiling Recessed
- Trimless deep type
- Extra low UGR design

Technical data:

▪ Light source	Citizen COB or others
▪ LED Power (max)	6.5W (180mA, 36V)
▪ System Power (ref.)	8W (ref. only depends on the ECG)
▪ Lumen flux (typ.)	600lm
▪ Colour temperature	2700K, 3000K, 4000K
▪ Colour rendering index	Ra \geq 90
▪ MacAdam Step	3
▪ Beam Angle	20D, 30D, 40D Lens type
▪ Tilttable	No
▪ Ingress protection	IP21
▪ Operation temperature	0-40C
▪ Protection Class	III
▪ LED Lifetime	50,000h L70B10
▪ Finishing	White RAL9003/Black RAL9005
▪ Construction	Aluminum
▪ Installation	Trimless, Ceiling Recessed
▪ Dimension	30mm(OD)x90mm(H)
▪ LED Driver	Remote

Electronic control gear

NON-DIM/Dimmable


IDP MP series

1-10V/0-10V/DALI

IDP SC series

Other brand is available upon request

*Use IDP multi-power LED Driver can trim down the output power according to actual application.

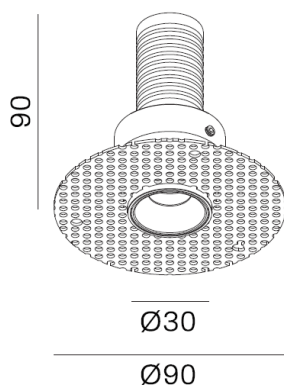

Light Distribution For 3000K

spot 18°			medium 32°			wide 39°		
h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	2149	ø0.31	1	633.2	ø0.58	1	442.2	ø0.71
2	537.2	ø0.63	2	158.3	ø1.16	2	110.6	ø1.43
3	238.8	ø0.95	3	70.36	ø1.74	3	49.14	ø2.15
4	134.3	ø1.26	4	39.58	ø2.32	4	27.64	ø2.87
5	85.95	ø1.58	5	25.33	ø2.90	5	17.69	ø3.58

The specification is subject to change without note.