

## TRIMLESS/SPOT LIGHT/TILTABLE/RECESSED

**Model: RR-DL3282**



### Feature:

- Deep ceiling Recessed
- Trimless design
- Low glare

### Technical data:

- Light source CREE COB or others
- LED Power (max) 9W (250mA, 36V)
- System Power (ref.) 11W (ref. only depends on the ECG)
- Lumen flux (typ.) 650lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index Ra $\geq$ 90
- MacAdam Step 3
- Beam Angle 24D, 36D, 60D Lens type
- Tiltable Yes
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Lifetime 50,000h L70B10
- Finishing White RAL9003/Black RAL9005
- Construction Aluminum
- Installation Trimless, Ceiling Recessed
- Dimension 78mm(OD)x66mm(H)/Cutout 90mm
- LED Driver Remote

### Electronic control gear

NON-DIM/Dimmable


**IDP** MP series

1-10V/0-10V/DALI

**IDP** SC series

Other brand is available upon request

\*Use IDP multi-power LED Driver can trim down the output power according to actual application.

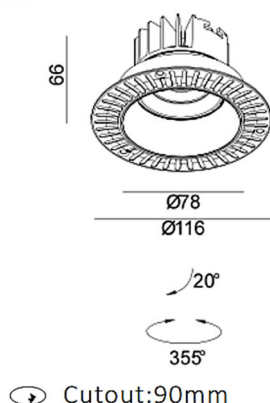

### LIGHT DISTRIBUTION for 3000K medium 36°

h(m)	E(lx)	Ø(m)
1	1218	Ø0.65
2	304.6	Ø1.30
3	135.4	Ø1.95
4	76.15	Ø2.60
5	48.74	Ø3.25

Photometric 3000K 36D Ra.90

\*\*The specification is subject to change without note.\*\*