


## TRIMLESS/SPOT LIGHT/TILTABLE/RECESSED/SQUARE TWIN HEADS

**Model: SR-DL3213**

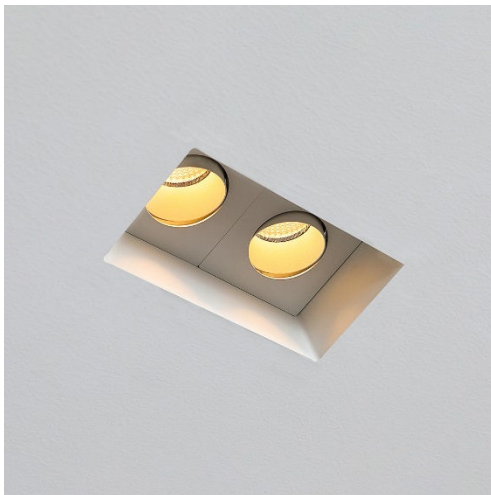

### Feature:

- Deep SQUARE ceiling Recessed
- Trimless design
- EXTRA Low glare

### Technical data:

▪ Light source	CREE COB or others
▪ LED Power (max)	2x7.2W (200mA, 36V)
▪ System Power (ref.)	2x9W (ref. only depends on the ECG)
▪ Lumen flux (typ.)	2x550lm
▪ Colour temperature	2700K, 3000K, 4000K
▪ Colour rendering index	Ra $\geq$ 90
▪ MacAdam Step	3
▪ Beam Angle	12D, 24D, 36D Reflector type
▪ Tilttable	Yes
▪ Ingress protection	IP21
▪ Operation temperature	0-40C
▪ Protection Class	III
▪ LED Lifetime	50,000h L70B10
▪ Finishing	White RAL9003/Black RAL9005
▪ Construction	Aluminum
▪ Installation	Trimless, Ceiling Recessed
▪ Dimension	134x70mm/Cutout 137x73mm
▪ LED Driver	Remote

### Electronic control gear

NON-DIM/Dimmable


**IDP** MP series


1-10V/0-10V/DALI

**IDP** SC series

Other brand is available upon request

\*Use IDP multi-power LED Driver can trim down the output power according to actual application.

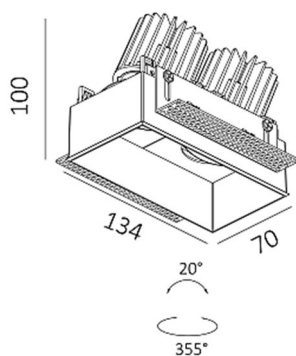

 Cutout:137\*73mm

**\*\*The specification is subject to change without note.\*\***