

TRIMLESS/SPOT LIGHT/TILTABLE

Model: RR-DL3593



Feature:

- Compact size with trimless design
- Semi Recessed with adjustable spot light
- Low UGR

Technical data:

- Light source COB or others
- LED Power (max) 7.2W (200mA, 36V)
- System Power (ref.) 9W (ref. only depends on the ECG)
- Lumen flux (typ.) 700lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 15D, 24D, 36D PMMA Lens
- Tilttable Yes
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Baffle finishing Black
- Construction Aluminum
- Installation Ceiling Recessed, spring type
- Dimension Refer to drawing
- LED Driver Remote

Electronic control gear

NON-DIM/Dimmable


IDP MP series

1-10V/0-10V/DALI

IDP SC series

Other brand is available upon request

*Use IDP multi-power LED Driver can trim down the output power according to actual application.

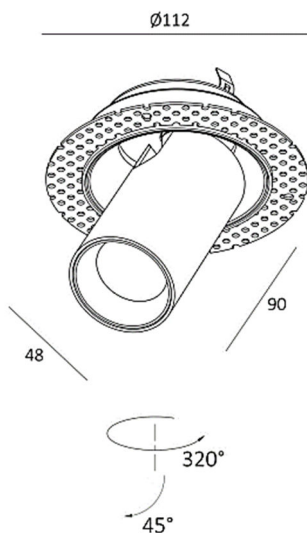

LIGHT DISTRIBUTION for 3000K medium 23°

h(m)	E(lx)	Ø(m)
1	1660	Ø0.39
2	415.1	Ø0.79
3	184.5	Ø1.19
4	103.8	Ø1.59
5	66.41	Ø1.98

****The specification is subject to change without note.****