

TRACK/SPOT LIGHT/ANTI-GLARE/SLIM TUBE

Model: TRA-TR3065




Feature:

- Spot light, track light
- 4 ways track adaptor with build in LED Driver
- Compact design

Technical data:

- Light source COB or others
- LED Power (max) 12.6W (350mA, 36V)
- System Power (ref.) 15W (ref. only depends on the ECG)
- Lumen flux (typ.) 1100lm
- Colour temperature 2700K, 3000K, 4000K
- Colour rendering index $Ra \geq 90$
- MacAdam Step 3
- Beam Angle 20D, 30D, 40D Reflector
- Tiltable yes
- Ingress protection IP21
- Operation temperature 0-40C
- Protection Class III
- LED Life time 50,000h L70B10
- Finishing White/Black
- Construction Aluminum
- Installation 4 ways track
- Dimension 40mm(OD)x178mm(H)
- LED Driver Build in track LED driver
- Trimless Version NA

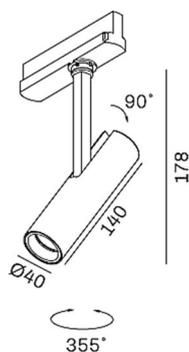

Electronic control gear

Build in track On/Off LED Driver
(Dimmable LED Driver is on request)

Light Distribution For 3000K

medium 26°			wide 38°		
h(m)	E(lx)	ø(m)	h(m)	E(lx)	ø(m)
1	2478	ø0.47	1	1498	ø0.68
2	619.5	ø0.94	2	374.5	ø1.36
3	275.3	ø1.40	3	166.4	ø2.04
4	154.9	ø1.87	4	93.62	ø2.72
5	99.12	ø2.34	5	59.92	ø3.41

****The specification is subject to change without note.****