

SPOT/CYLINDAR/CUP/SURFACE MOUNT/TRIPLE HEADS

Model: SU-SD3051



Feature:


- Surface mount TRIPLE CUP Shape spot light
- 355 degree rotate and 40 degree tilt
- Interchangeable baffle

Technical data:

- | | |
|--------------------------|---------------------------------------|
| ▪ Light source | COB or others |
| ▪ LED Power (max) | 7.2W x 3 (200mA x 3, 36V) |
| ▪ System Power (ref.) | 9W x 3 (ref. only depends on the ECG) |
| ▪ Lumen flux (typ.) | 1500lm |
| ▪ Colour temperature | 2700K, 3000K, 4000K |
| ▪ Colour rendering index | Ra≥90 |
| ▪ MacAdam Step | 3 |
| ▪ Beam Angle | 36D Reflector |
| ▪ Tilttable | Yes |
| ▪ Ingress protection | IP21 |
| ▪ Operation temperature | 0-40C |
| ▪ Protection Class | III |
| ▪ LED Life time | 50,000h L70B10 |
| ▪ Finishing | White/Black |
| ▪ Baffle Finishing | White/Black/Silver Grey/Sand Brass |
| ▪ Construction | Aluminum |
| ▪ Installation | Surface mount |
| ▪ Dimension | 230mm(OD)x88mm(H) |
| ▪ LED driver | Build in |
| ▪ Trimless version | No |

Electronic control gear

Build in on/off LED driver

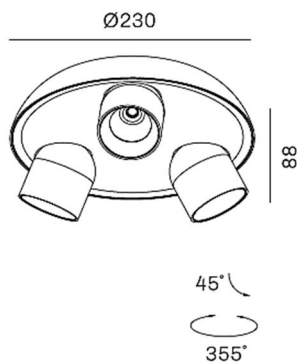

Light Distribution For 3000K medium 36°

h(m)	E(lx)	ø(m)
1	4342	ø0.64
2	1074	ø1.29
3	472.2	ø1.93
4	261.0	ø2.58
5	161.2	ø3.22

****The specification is subject to change without note.****